


SV-OSFP-400G-PLR1

Starview OSFP 400G-DR4++ aggregating 4 x 100Gbps 1310nm SM (MPO12 APC) with DDM, distance up to 10km

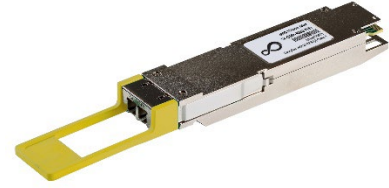

Features

- Supports 425Gbps
- Single 3.3V Power Supply
- Power dissipation < 10W
- Up to 10km over SMF
- RoHS compliant
- OSFP MSA Compliant
- 8x53.125Gbps(PAM4) electrical interface
- MPO-12 connector
- Commercial case temperature range of 0°C to 70°C
- PIN and TIA array on the receiver side
- I2C interface with integrated Digital Diagnostic Monitoring
- Safety Certification: TUV/UL/FDA

Applications

- 4 x 100G LR applications
- Data center
- Enterprise networking
- Infiniband interconnects

Part number	Description
SV-OSFP-400G-PLR1	Starview OSFP 400Gbps module 400G-DR4++ aggregating 4 x 100Gbps 1310nm SM (MPO12 APC) with Digital Diagnostic Monitoring (DDM), distance up to 10km

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit
Storage Temperature	Ts	-40	+85	°C
Supply Voltage	Vcc	-0.5	3.6	V
Damage threshold	Rxdmg	5.5		dBm

Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit
Operating Case Temperature	Tc	0		70	°C
Power Supply Voltage	Vcc	3.135	3.3	3.465	V
Operating Relative Humidity	RH	0		85	%
Power Dissipation	P _D			10	W

* Power Supply specifications, Instantaneous, sustained and steady state current compliant with OSFP MSA Power Classification.

Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max	Unit	Notes
Transmitter						
Differential data input swing per lane		900			mV _{p-p}	
Differential input impedance	Z _{in}	90	100	110	ohm	
Stressed input parameters						
Eye width		0.265			UI	@TP4, all 3 PAM4 eyes, 1E-5
DC common mode voltage		-350		2850	mV	
Receiver						
Differential output amplitude				900	mV _{p-p}	
Differential output impedance	Z _{out}	90	100	110	ohm	
Output Rise/Fall Time	t _r /t _f	9.5			ps	20%~80%
Eye width		0.265			UI	
Eye height differential		70			mV	@TP4, all 3 PAM4 eyes, 1E-5

Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit
Transmitter					
Signaling speed per lane	BRAVE		53.125±100 ppm		GBd
Modulation format			PAM4		

DATASHEET 5.0

Center wavelength	λ_C	1304.5	1311	1317.5	nm
Side-mode Suppression Ratio	SMSR	30			dB
Average launch power, each lane*(note7)	TxAVG	-1.4		4.5	dBm
Outer Optical Modulation Amplitude (OMA _{outer})*(note8)	TxOMA	0.7		4.7	dBm
Launch power in OMA _{outer} minus TDECQ: for extinction ratio ≥ 4.5 dB		-0.7			dBm
for extinction ratio < 4.5 dB		-0.6			
Transmitter and dispersion penalty eye closure for PAM4 (TDECQ)				3.4	
TDECQ - $10 \cdot \log_{10}(C_{eq})$ *(note14)				3.4	
Average launch power of OFF transmitter	TxOFF			-15	dB
Extinction Ratio	ER	3.5			dB
Optical return loss tolerance	TOL			15.6	dB
Transmitter reflectance*(note9)	TR			-26	dB
Transmitter transition time				17	ps
RIN _{15.6 OMA}				-136	dB/Hz
Receiver					
Signaling speed per lane	BRAVE		53.125 \pm 100 ppm		GBd
Center wavelength	λ_C	1304.5	1311	1317.5	nm
Damage threshold each lane*(note10)	Rxdmg	5.5			dBm
Average receive power each lane*(note11)	RxAVG	-7.7		4.5	dBm
Receive power, (OMA _{outer}) each lane	RxOMA			4.7	dBm
Receiver reflectance	Rr			-26	dB
Receiver sensitivity (OMA _{outer}), each lane*(note12)	RS			max(-6.1,5 ECQ-7.5)	dBm
Stressed Receiver sensitivity (OMA _{outer}) each lane*(note13)	RXSRS			-4.1	dBm
Conditions of stressed receiver sensitivity test:					
Stressed eye closure for PAM4 (SECQ)				3.4	dB
SECQ - $10 \cdot \log_{10}(C_{eq})$ *(note14)				3.4	dB
LOS Assert	LOSA	-15			dBm
LOS De-Assert	LOSD			-10	dBm
LOS Hysteresis	LOSH	0.5			dB

Note7: Average launch power, each lane (min) is informative and not the principal indicator of signal strength. A transmitter with launch power below this value cannot be compliant; however, a value above this does not ensure compliance.

Note8: Even if the TDECQ < 1.4 dB for an extinction ratio of ≥ 4.5 dB or TDECQ < 1.3 dB for an extinction ratio of

< 4.5 dB, the OMA_{outer} (min) must exceed this value.

Note9: Transmitter reflectance is defined looking into the transmitter.

Note10: The receiver shall be able to tolerate, without damage, continuous exposure to an optical signal having this average power level. The receiver does not have to operate correctly at this input power.

Note11: Average receive power, (min) is informative and not the principal indicator of signal strength. A received power below this value cannot be compliant; however, a value above this does not ensure compliance.

Note12: Receiver sensitivity (OMA_{outer}), (max) is informative and is defined for a transmitter with a value of SECQ up to 3.4 dB.

Note13: Measured with conformance test signal at TP3 for the BER specified in IEEE Std 802.3cd clause 140.1.1.

Note14: C_{eq} is a coefficient defined in IEEE Std 802.3-2018 clause 121.8.5.3 which accounts for reference equalizer noise enhancement.

Note15: The parameters might change due to the 400G LR4 spec has not been finalized.