

Optical Adapter



SC-LC Adapter




SC-LC Adapter



FC-LC Adapter



FC-LC Adapter

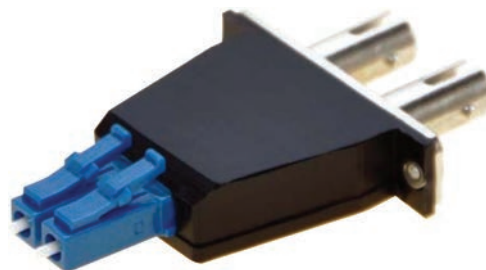

ST-LC Adapter

Specifications

| | | | | |
|--------------------------|---|---------|---------|---------|
| Fastening | LC, SC, FC, ST, SC-ST, FC-ST, FC-SC, FC-LC, | | | |
| Body | SM | | | MM |
| Ferrule | PC | UPC | APC | PC |
| Insertion Loss (Typical) | ≤ 0.3dB | ≤ 0.2dB | ≤ 0.3dB | ≤ 0.2dB |
| Return Loss | ≥ 45dB | ≥ 50dB | ≥ 60dB | ≥ 30dB |
| Exchangeability | ≤ 0.2dB | | | |
| Repeatability | ≤ 0.2dB | | | |
| Temperature | -40°C to 85°C | | | |